


Gfp Film Products

Overview

In-stock. Drop-shipped. Quality assured.
Film products built to perform and built to ship without problems.

Gfp Digital Print Finishing machines are trusted across the industry and our film products are built to match. Manufactured with premium materials and controlled processes for consistent results, these pressure-sensitive films deliver reliable performance at competitive prices. All adhesives are 7.0 pH neutral for long-term image stability and color integrity.

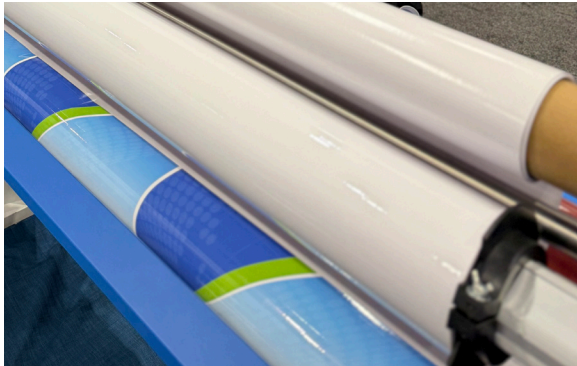

GFP FILM OVERLAMINATES

Protect the print. Extend the life.

Pressure-sensitive films for demanding wide-format applications, indoors or outdoors.

- Economy and Intermediate grades
- Matte, gloss, textured, anti-graffiti, slip-resistant, write-on/wipe-off finishes
- UV inhibitors to help reduce color fade
- High-performance solvent acrylic adhesives
- Compatible with Solvent, Eco-Solvent, Latex, UV, and screen-printed inks



GFP MOUNTING ADHESIVES

Engineered for lasting bonds.

Pressure-sensitive mounting films designed for reliable finishing across rigid and flexible applications, formulated for consistent performance in demanding production environments.


- Decals and flexible graphics
- Pre-coating mounting boards
- Face mounting to Plexiglas®
- POP, promotional, and display graphics





BUILT FOR PRODUCTION

- **Thicker PVC substrates:** Easier webbing. Added body to the finished image.
- **Thicker liners:** Smoother adhesive surface. Reduced orange peel and film texture.
- **Solvent-base adhesive technology:** Resists temperature extremes, chemicals, and moisture. Provides longer-term bonds to PVC and synthetic substrates.
- **Splice-free rolls:** Eliminates wasted prints and web breaks.

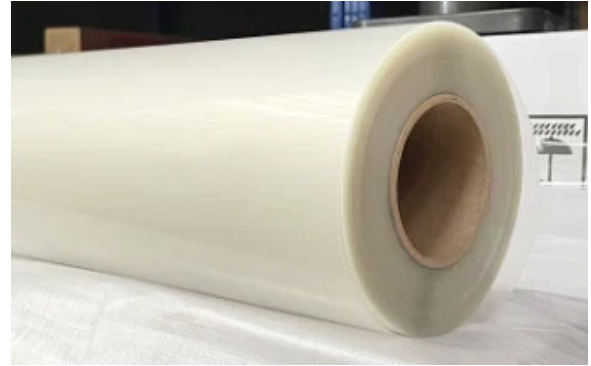

PACKAGING THAT PROTECTS PRODUCTIVITY

- 5-layer double wall corrugated boxes provide greater protection than standard 3-layer cartons.
- Rolls are suspended using shatter-resistant ABS core plugs to prevent flat-sided rolls.
- Each roll is wrapped in protective plastic to guard against dust and dirt.
- Product identification labels are applied to the outer box, plastic wrap, and roll core for clear tracking from shipping to storage.

Product Packaging



Your Local Dealer:

Gfp Laminating Film Products

Easier application. Better image. Longer life.

Gfp pressure-sensitive laminating films are engineered for trouble-free finishing of demanding wide-format graphics. Designed for both indoor and outdoor applications, these films protect printed images from UV exposure, abrasion, and contamination while enhancing color depth and overall image quality.



Economy PSA Overlaminates Films

Economy overlaminates provide affordable protection against UV exposure, abrasion, and everyday wear. Monomeric PVC films with UV inhibitors designed for indoor and short-term outdoor graphics up to 3 years durability with vertical exposure. Each film is coated with 1 mil permanent solvent acrylic adhesive and protected by a 70# white PE-coated release liner.

Gloss – 3.2 mil (80 μ)

- Produces vibrant colors and strong image contrast.
- Ideal for signage, POP displays, posters, and photographic graphics.

Luster – 3.2 mil (80 μ)

- Reduces glare while maintaining strong color reproduction.
- Ideal for promotional displays and event signage.

Matte – 3.2 mil (80 μ)

- Flat finish that softens reflections and reduces glare.
- Ideal for trade show graphics and POP displays.

Textured Matte 3 mil

- Adds scuff resistance and minimizes glare.
- UL 410 approved for interior floor graphics.

Textured Matte 5 mil

- Adds rigidity and durability to graphics.
- Ideal for trade show panels, counter mats, and placemats.



Intermediate PSA Overlamine Films

Polymeric PVC films with enhanced UV protection for medium-term outdoor graphics up to 5 years durability. Advanced plasticizers improve outdoor stability while reducing shrinkage from plasticizer migration. Each film is coated with 1 mil permanent solvent acrylic adhesive and protected by a 70# white PE-coated release liner.

Gloss – 3.2 mil (80 μ)

- Enhances depth of color and image contrast.
- Ideal for commercial signage, displays, banners, and flat vehicle graphics.

Luster – 3.2 mil (80 μ)

- Low-glare surface for improved viewing from multiple angles.
- Ideal for promotional displays and event signage.

Matte – 3.2 mil (80 μ)

- Reduces reflections for a softer visual presentation.
- Ideal for trade show graphics and POP displays.



Specialty PSA Overlamine Films

Special-purpose laminates designed for indoor or short-term outdoor graphics up to 2 years durability with vertical exposure.

Anti-Graffiti Film


Hard-coated polyester laminate that protects graphics from vandalism. Spray paint and marker ink can be removed using solvents without damaging the image.

Dry Erase Film

Writable laminate that wipes clean for reusable surfaces such as planners, maps, displays, menus, and presentation boards.



Self-Wound PSA Overlamine Films

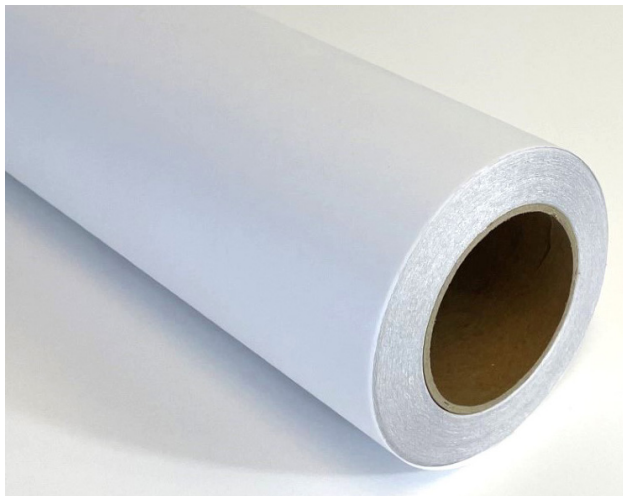

Self-wound linerless films offer a cost-effective alternative to traditional PVC laminates. These polyester films eliminate the need for a release liner, allowing faster processing and reduced material waste.

Coated with 0.8 mil permanent water-based acrylic adhesive, these films are compatible with digital media printed using solvent, eco-solvent, latex, UV, and screen printing technologies. Non-toxic and phthalate-free, compliant with California Prop 65 requirements.


Polyester (PET) Laminates

Gloss – 1 mil (25 μ)

- Non-yellowing polyester laminate that enhances color depth and image vibrancy.
- Ideal for product labels, stickers, signage, POP displays, and advertising graphics.

Matte – 1 mil (25 μ)

- Soft surface texture that reduces reflections and protects against fingerprints.
- Ideal for trade show graphics, signage, and UV-printed boards.

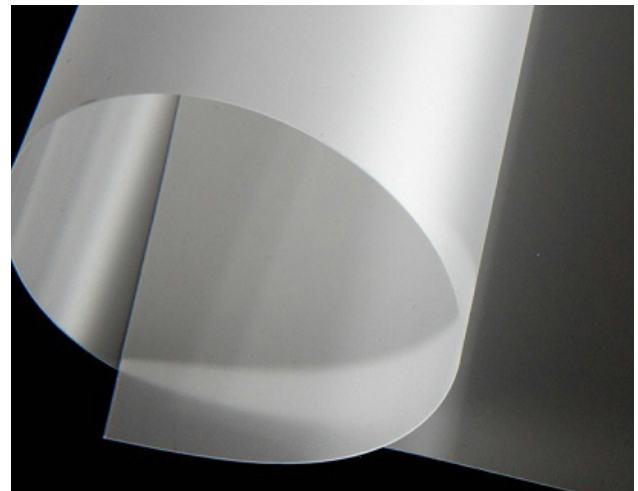

Kraft Paper Backing



30# brown kraft paper made from virgin fibers with minimal recycled mill scrap. Double-side machine-calendared for smooth operation.

Used as a backing paper for single-sided PSA lamination to protect laminator rollers from adhesive buildup.

Laminating Film Products Rolls Sizes & Part Numbers

Economy Films		
Gloss	Part Number	Roll Size
	PSG-5430	54" x 30'
	PSG-20150	20" x 150'
	PSG-25150	25" x 150'
	PSG-30150	30" x 150'
	PSG-38150	38" x 150'
	PSG-43150	43" x 150'
	PSG-51150	51" x 150'
	PSG-54150	54" x 150'
	PSG-61150	61" x 150'
Luster	PSL-5430	54" x 30'
	PSL-25150	25" x 150'
	PSL-30150	30" x 150'
	PSL-38150	38" x 150'
	PSL-43150	43" x 150'
	PSL-51150	51" x 150'
	PSL-54150	54" x 150'
	PSL-61150	61" x 150'
Matte	PSM-5430	54" x 30'
	PSM-20150	20" x 150'
	PSM-25150	25" x 150'
	PSM-30150	30" x 150'
	PSM-38150	38" x 150'
	PSM-43150	43" x 150'
	PSM-51150	51" x 150'
	PSM-54150	54" x 150'
	PSM-61150	61" x 150'
Textured Matte 3 mil	TM3-5430	54" x 30'
	TM3-38150	38" x 150'
	TM3-43150	43" x 150'
	TM3-51150	51" x 150'
	TM3-54150	54" x 150'
	TM3-61150	61" x 150'
Textured Matte 5 mil	TM5-5430	54" x 30'
	TM5-38150	38" x 150'
	TM5-51150	51" x 150'
	TM5-54150	54" x 150'
	TM5-61150	61" x 150'

Intermediate Films		
Gloss	Part Number	Roll Size
	ODG-5430	54" x 30'
	ODG-54150	54" x 150'
	ODG-60150	60" x 150'
Luster	ODL-5430	54" x 30'
	ODL-54150	54" x 150'
	ODL-60150	60" x 150'
Matte	ODM-5430	54" x 30'
	ODM-54150	54" x 150'
	ODM-60150	60" x 150'

Specialty Films		
Anti-Graffiti	PAG-5430	54" x 30'
	PAG-38150	38" x 150'
	PAG-54150	54" x 150'
Dry Erase	PDR-5430	54" x 30'
	PDR-51150	51" x 150'
	PDR-54150	54" x 150'

Polyester Self-Wound Films		
Gloss	SMPETG-54300	54" x 300'
Matte	SWPETM-54300	54" x 300'

Kraft Paper		
Brown	KPB-25450	25" x 450'
	KPB-30450	30" x 450'
	KPB-38450	38" x 450'
	KPB-43450	43" x 450'
	KPB-51450	51" x 450'
	KPB-55450	55" x 450'
	KPB-61450	61" x 450'

Laminating Film Technical Specs

Economy UV PSA Overlaminates	
Substrate	3.2 mil (80 μ) Calendered Polymeric PVC; Textured Matte - 3.2mil (80 μ)
Adhesive	0.9 mil (22 μ) Permanent Clear Solvent based Acrylic
Liner	70# (105gsm) White Siliconized Paper
Durability	Up to 3 years, vertical exposure outdoors
Textured Matte	UL 410 approved for slip resistance on interior floors
Finishes	Gloss, Luster, Matte, Textured Matte: 3 mil and 5 mil
Gloss Level	@ 60° Reflection: 100, 30, 15, 8, and 6

Intermediate UV PSA Overlaminates	
Substrate	3.2 mil (80 μ) Calendered Polymeric PVC
Adhesive	0.9 mil (22 μ) Permanent Clear Solvent based Acrylic
Liner	70# (105gsm) White Siliconized Paper
Durability	Up to 5 years, vertical exposure outdoors
Finishes	Gloss, Luster, Matte
Gloss Level	@ 60° Reflection: 100, 30, and 15

Specialty – Anti-Graffiti PSA Overlaminates	
Substrate	1.5 mil (37 μ) Clear Hard Coated Polyester (PET)
Adhesive	0.9 mil (22 μ) Permanent Clear Solvent Based Acrylic
Liner	70# (105gsm) White Siliconized Paper
Durability	Up to 2 years, vertical exposure outdoors
Finishes	Gloss
Gloss Level	@ 60° Reflection: 90

Specialty – Dry Erase PSA Overlaminates	
Substrate	2.0 mil (50 μ) Clear Polypropylene (OPP)
Adhesive	0.9 mil (22 μ) Permanent Clear Solvent Based Acrylic
Liner	70# (105gsm) White Siliconized Paper
Durability	Up to 2 years, vertical exposure outdoors
Finishes	Gloss
Gloss Level	@ 60° Reflection: 90

Laminating Film Technical Specs *(continued)*

Self-wound PSA Overlamine – Polyester (PET)	
Substrate	1 mil (25μ) Clear Polyester (PET)
Adhesive	0.8 mil (20μ) Permanent Optically Clear Water Based Acrylic
Liner	None
Durability	Up to 5 years, vertical exposure outdoors; Non-toxic and phthalate-free, California Prop 65 compliant
Finishes	Gloss and Matte
Gloss Level	@ 60° Reflection: 85 and 20

Kraft Paper	
Substrate	30# (409gsm) Virgin fibers with low re-pulped mil scrap paper double-sided machine calendared
Adhesive	None
Finishes	Brown

Application & Durability Guidelines

Gfp laminating films are suitable for signage on flat or slightly curved surfaces with vertical exposure under normal conditions and application temperatures ranging from 40°F to 176°F.

Durability of the laminate (whether monomeric or polymeric) depends on proper drying, curing, and outgassing of printed inks prior to lamination. Printed PVC must be allowed to dry for 24–48 hours at 70°F before lamination to allow residual solvent to evaporate. Failure to allow adequate drying time may result in delamination, tunneling, PVC shrinkage, or adhesive failure.

Durability estimates apply only to the laminating film, not to the printed image. These estimates are based on accelerated aging tests and outdoor exposure under typical temperate climate conditions with vertical exposure.

Exposure to severe humidity, high ultraviolet intensity, polluted environments, high altitude, horizontal installations, or south-facing exposure may significantly reduce durability. In some conditions, expected outdoor life may be reduced by as much as half. Because of these environmental variables, outdoor durability ratings should be used only as a general guide when selecting the appropriate product.

Important Notice

Gfp products are warranted to be free from defects in material and workmanship (see Gfp Product Warranty Statement). Product information is based on research the company believes to be reliable; however, such information is provided without guarantee and does not constitute a warranty.

Users should conduct their own evaluation of the product to determine suitability for their specific application. The purchaser assumes all risks associated with product use.

Gfp Mounting Adhesive Products

Flawless finish. Flexible applications. Superior Bond.

Designed for professional digital print mounting applications, Gfp mounting adhesives deliver reliable, long-lasting performance across a wide range of substrates. All products feature 1 mil pressure-sensitive permanent adhesive with neutral 7.0 pH for long-term image stability.

Clear Mount

- 1 mil (25 μ) clear polyester mounting adhesive.
- Clear polyester carrier coated on both sides with permanent solvent acrylic adhesive. One side bonds to the printed image and the other to the mounting board.
- Provides reliable adhesion to paper-faced boards such as Gatorfoam[®] and low-energy plastics including polystyrene, Sintra[®], Gatorboard, and Ultraboard[™].

Recommended for: Decaling printed images or pre-coating mounting boards prior to mounting.

White Mount

- 3 mil (75 μ) white polypropylene mounting adhesive.
- White polypropylene carrier with 87% opacity designed to reduce color shift when mounting graphics to dark substrates such as Black Gatorboard.
- Coated on both sides with aggressive water-based acrylic adhesive for strong, consistent bonds.

Recommended for: Decaling printed images or mounting to dark boards where bleed-through must be prevented.

Front Mount

- 1.4 mil (36 μ) optically clear polyester mounting adhesive.
- Optically clear polyester carrier coated on both sides with permanent solvent acrylic adhesive for face mounting graphics to clear substrates.
- The printed image is viewed through materials such as Plexiglas[®], acrylic, polycarbonate, or glass, creating a premium display finish.

Recommended for: POP displays, window graphics, backlit displays, trade show graphics, and promotional signage.



Mounting Adhesive Technical Specs

Clear Mounting Adhesive (MAC)	
Base Carrier	0.9 mil (23 μ) Clear Polyester (PET)
Adhesive #1	1.0 mil (25 μ) Permanent Clear Solvent-based Acrylic
Adhesive #2	1.0 mil (25 μ) Permanent Clear Solvent-based Acrylic
Liner	75# (110gsm) two side PE coated and siliconized white Kraft paper
pH-value	Approximately 7.0 neutral
Durability	Up to 2 years, vertical exposure outdoors

White Mounting Adhesive (WMA)	
Base Carrier	3.0 mil (75 μ) White Biaxially oriented Polypropylene
Adhesive #1	1.0 mil (25 μ) Permanent Clear Water-based Acrylic
Adhesive #2	1.0 mil (25 μ) Permanent Clear Water-based Acrylic
Liner	60# (88gsm) two side PE coated and siliconized white Kraft paper
pH-value	Approximately 7.0 neutral
Opacity	87%
Durability	Up to 2 years, vertical exposure outdoors

Front Mounting Adhesive (MAF)	
Base Carrier	1.4 mil (36 μ) Optically Clear Polyester (PET)
Adhesive #1	1.0 mil (25 μ) Permanent Clear Solvent-based Acrylic
Adhesive #2	1.0 mil (25 μ) Permanent Clear Solvent-based Acrylic
Liner #1	1.4 mil (36 μ) Siliconized Clear Polyester (PET)
Liner #2	1.4 mil (36 μ) Siliconized Clear Polyester (PET)
pH-value	Approximately 7.0 neutral
Durability	Up to 2 years, vertical exposure outdoors

Mounting Adhesive Roll Rolls Sizes & Part Numbers

Clear Mount	
Part Number	Roll Size
MAC-5130	51" x 30'
MAC-25150	25" x 150'
MAC-38150	38" x 150'
MAC-43150	43" x 150'
MAC-51150	51" x 150'
MAC-54150	54" x 150'

Clear Mount	
Part Number	Roll Size
WMA-5130	51" x 30'
WMA-38150	38" x 150'
WMA-51150	51" x 150'
WMA-61150	61" x 150'

Clear Mount	
Part Number	Roll Size
MAF-5130	51" x 30'
MAF-38150	38" x 150'
MAC-51150	51" x 150'

Application Guidelines

Gfp Mounting Adhesives are suitable for short- to medium-term indoor or outdoor signage applications for up to 2 years with vertical exposure under normal conditions, and application temperatures ranging from 40°F to 176°F.

Bond strength depends on the amount of adhesive contact developed with the mounting surface. Applying firm pressure and moderate heat will help the adhesive achieve optimal contact.

For best results, mounting surfaces must be clean and dry. Surface preparation may be required prior to mounting, including wiping with alcohol, light sanding, or surface sealing depending on the substrate.

Important Notice

Gfp products are warranted to be free from defects in material and workmanship (see Gfp Product Warranty Statement). Product information is based on research the company believes to be reliable; however, such information is provided without guarantee and does not constitute a warranty.

Users should conduct their own evaluation of the product prior to use to determine its suitability for their specific application. The purchaser assumes all risks associated with product use.

Your Local Dealer:

